

SAMSUNG

TECHWIN

SAMSUNG DIGITall
everyone's invited™

Samsung Digital Presenter SDP-950ST/DX



Compact

Easy To Carry...5.5kgs (Body only)
Saving Space in Your Conference Room



Professional Lens

- : The Brightest And Finest Picture Quality By 1/3" 850,000 Pixels PS(Progressive Scan) CCD
- : An Exclusive 12X Powered Optical Zoom Lens(F3.0, f=6.3~75.6mm)
- : The Fastest And Perfect Auto Focus / Depth of Field 250mm
- : Continuously Working Auto focus
- : 15 Frame Rate Per Second



Easier to Use

- : Convenient Digital Function
 - 90° / 180° / 270° / 360° Rotation (Zoom Available)
 - Image Split & Shift - Image Freeze
 - 3X3 Screen Display - 8 Frames Save
 - 8 Functions Preset upto 4 Conditions
 - Negative / Positive Image Conversion
- : The Most Versatile PC And AV Interface (USB, RS-232, Twain, Win/Mac)
- : Pull down Menu, Writing & Drawing on the Screen by PC Mouse (PS/2)






Samsung Digital Presenter SDP-950 ST/DX

SPECIFICATION	DESCRIPTION	SDP-950ST	SDP-950DX	
OPTICAL SYSTEM	LENS, ZOOM	F3.0, f=6.3-75.6mm [12X POWERED OPTICAL ZOOM]		
	SHOOTING AREA	MAX: 297mm X 210mm [11.59 X 8.27 Inch], MIN: 32mm X 24mm [1.26 X 0.94 Inch]		
	FOCUS	AUTO FOCUS / MANUAL FOCUS		
	IRIS	AUTO / MANUAL		
VIDEO	ADAPTOR LENS	REMOVABLE		
	PICK-UP DEVICE	1/3" 850,000 PIXELS PSIPROGRESSIVE SCAN) CCD		
	TOTAL PIXELS	1,077(H) X 788(V)		
	EFFECTIVE PIXELS	1,024(H) X 768(V)		
	FRAME RATE	15 FRAMES/SEC		
	SYNC SYSTEM	INTERNAL SYNC.		
	RESOLUTION	VGA OUT - HORIZONTAL: 570TVL / VIDEO OUT - HORIZONTAL : 350TVL		
	S/N RATIO	48dB		
PC INTERFACE	VIDEO OUTPUT	C-VIDEO / S-VIDEO		
	VGA OUTPUT	1,024 X 768 [XGA] RGB COLOR / 800 X 600 [SVGA] RGB COLOR / 640 X 480 [VGA] RGB COLOR		
	WHITE BALANCE	AUTO / MANUAL		
	USB	BUILT-IN		
DIGITAL FUNCTIONS	RS-232C	BUILT-IN		
	APPLICATION SOFTWARE	WIN / MAC		
LIGHTING SYSTEMS	GRAPHIC USER INTERFACE	PULL DOWN MENU, WRITING & DRAWING ON THE SCREEN BY PC MOUSE [PS/2]		
	IMAGE FREEZE	AVAILABLE		
	NEGATIVE/POSITIVE	SELECTABLE		
	IMAGE SAVE & RECALL	NOT AVAILABLE	8 FRAMES SAVE, 3X3 FRAMES MULTI-DISPLAY	
	IMAGE SPLIT AND SHIFT	NOT AVAILABLE	2 IMAGES [SAVE / LIVE]	
TERMINALS	IMAGE ROTATION	NOT AVAILABLE	SWITCHABLE BY 90°	
	PRESET SAVE	8 FUNCTIONS PRESET UPTO 4 CONDITIONS [ZOOM, FOCUS, IRIS, POSI/NEGA & etc.]		
	UPPER LAMP	SIDE ARM LAMPS		
REMOTE CONTROLLER	LOWER LAMP	BOTTOM LIGHT BOX		
	INPUT	VGA X 2 MOUSE X 1 VGA [15P DIN] X 2 S-VIDEO X 1 / C-VIDEO X 1 [RCA] USB X 1 RS-232C[9 PIN] X 1		
OPERATION TEMPERATURE	SUPPLIED			
OPERATION HUMIDITY	+5 °C ~ +35 °C			
POWER SOURCE	30% ~ 90%			
POWER CONSUMPTION	AC 100V ~ 240V FREE VOLTAGE, 50/60Hz			
WEIGHT	5.5Kgs [12.13lb]			
DIMENSION	510mm[W] X 575mm[H] X 410mm[D] [IN USE] / 20.1[W] X 22.6[H] X 16.1[D] Inch [IN USE]			
OPTIONAL ACCESSORIES	LCD MONITOR, CARRYING BAG, LIGHT BOX			

Rear Panel



Dimension

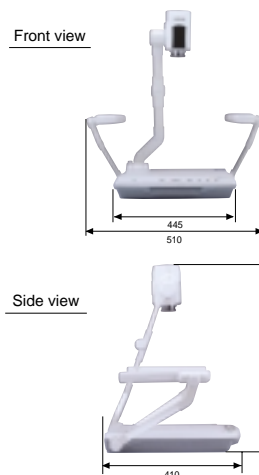

Option



: BAG-950
Deluxe carrying bag



: LCD-5500
You can preview your presentation.

www.samsungpresenter.com

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD
145-3 Sangdaewon 1-Dong, Jungwon-Gu,
Sunngnam, Kyungki-Do, Korea 462-121
TEL:82-31-740-8137-8141 FAX:82-31-740-8145

SAMSUNG OPTO-ELECTRONICS AMERICA, INC.
ELECTRONIC IMAGING DIV.
40 Seaview Drive, Secaucus N.J. 07094, U.S.A
TEL:201-902-0347 FAX:201-902-9342

SAMSUNG TECHWIN MOSCOW OFFICE
LENNINGRADSKY PR-KT. 37-A. KORP.14
RUSSIA, 125167, MOSCOW
TEL:7-095-258-9296,9298 FAX:7-095-258-9297

■ DISTRIBUTED BY

